
 Polyester

P730 LINX



6619 black

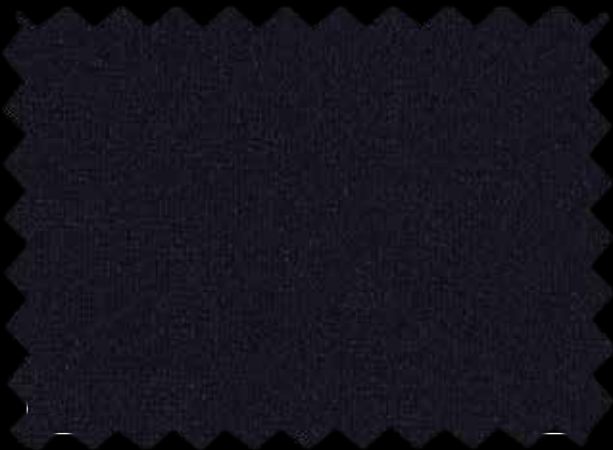

**2413 neon pink*



3310 white - 3710 white PFP



10717 deep teal

P730 LYNX

Applications
> Activewear

Lynx finds its place in the yogawear and gymwear world. Soft, stretchy and naturally breathable, Lynx is a high-performance sportswear fabric that shapes the body and keeps it fresh. Its texturized polyester and quick-dry function make it the best choice for leggings and sports bra.



Composition			
Polyester	Elastane		
84%	16%		
Weight (±5%)	Width (+3%/-2%)		
210 g/m²	315 g/m lin.		
150 cm			
Courses	Wales		
44/cm	26/cm		
Tolerance for composition (standard ASTM)			
±3%			
Dimensional Change of fabric after HL AATCC 135-2015 (1 wash, normal cycle at 41 degree Celsius line dry)	Max	Max	
	-5%	-5%	
	Width	Length	
Resistance to pilling ASTM D 3512-Random tumble at 30 minutes photographic rating STD	4 to 4.5		
Ultraviolet Protection Factor (U.P.F.) AATCC 183-2010	50+		
Stretch to dynamometer (±15%) ASTM D 4964 - LOAD 20 LBS	120%	180%	
	Width	Length	
	(min 102% - max 138%)	(min 153% - max 207%)	
Modulus % elongation (30% - 50% - 70%)	30%	50%	70%
	0.2-0.9	0.9-2.0	2.2-4.2
	0.0-0.4	0.5-1.3	1.3-2.2
Care labelling codes	Width Lbs	Length Lbs	



AATCC Standards

COLOUR	CHLORINATED WATER AATCC 162		LIGHT AATCC 16-20 AFU		WATER 38°C AATCC 107					SEA WATER 38°C AATCC 106					PERSPIRATION AATCC 15					CROCKING AATCC 8		WASHING 49°C AATCC 61-2A										
	C.C.	C.C.	C.C.	AC	CO	PA	PL	PC	WO	C.C.	AC	CO	PA	PL	PC	WO	C.C.	AC	CO	PA	PL	PC	WO	S.CO DRY	S.CO WET	C.C.	AC	CO	PA	PL	PC	WO
3310	4	4	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	5	5	4.5	5	5	5	5	5	5
3710	4	4	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	5	5	4.5	5	5	5	5	5	5
*2413	4.5	3.5 ¹	4.5	4	4.5	4	4.5	4.5	4.5	4.5	4	4.5	4	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4	4.5	3	4	2.5	4	4.5	4
10717	4.5	4	4.5	3.5	4	3.5	4	4.5	4	4.5	3.5	4	3.5	4	4.5	4	4.5	4	4.5	4	4.5	4.5	4.5	4	4.5	4	4.5	3.5	4	4.5	4	4
6619	4.5	4.5	4.5	3.5	4	3	3.5	4	3.5	4.5	3.5	4	3	3.5	4	3.5	4.5	4	4.5	4	4.5	4.5	4	3	3.5	4.5	3.5	4	3	3.5	4	3.5

¹ Fluorescent Colours - CF TO LIGHT AATCC 16-10 AFU

ISO Standards

COLOUR	CHLORINATED WATER ISO 105-E03	LIGHT ISO 105-B02	WATER ISO 105-E01			SEA WATER ISO 105-E02			ALKALINE PERSPIRATION PH 8.0 ISO 105-E04			ACID PERSPIRATION PH 5.5 ISO 105-E04			CROCKING ISO 105-X12		WASHING 40°C ISO 105-C06 A25		
	C.C. 50 mg/l	C.C.	C.C.	CO	PA	C.C.	CO	PA	C.C.	CO	PA	C.C.	CO	PA	S.CO DRY	S.CO WET	C.C.	CO	PA
3310	3	4	4-5	5	5	4-5	5	5	4-5	5	5	4-5	5	5	5	5	4-5	5	5
3710	3	4	4-5	5	5	4-5	5	5	4-5	5	5	4-5	5	5	5	5	4-5	5	5
*2413	4	3	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4	4-5	4	3
10717	4	4	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4	4-5	4	3-4
6619	4-5	4-5	4-5	4	3-4	4-5	4	3-4	4-5	4	3-4	4-5	4	3-4	3	3-4	4-5	4	3-4

Available colors: the 4 colors presented in this page are always available for sampling. If you would like to choose a color from the main Polyester color card, you can enjoy a MCQ of only 70 mts for bulk orders. However, the resulting color shade and the color fastness performance may be slightly different. We will submit to your attention a lab dip swatch for approval before going on with the bulk production.

Special notes/warnings: we recommend carrying out lab tests for color matches, molding, bonding and applications on fabrics in order to prevent problems from arising during garments production. Please carefully check physical data and color fastness forecasts.

P730 LYNX



moisture management




soft touch



two way stretch



UV protection



high coverage